


- 1 Access floor panel
- 2 Plastic edge trim (optional)
- 3 Pedestal glue
- 4 Pedestal
- 5 Gasket

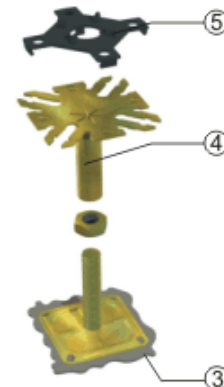

### System description

- **Panel**  
fibre-reinforced calciumsulphate panel, steel sheet at bottom, surrounding edge trim protection against damage and humidity, edges inclined, on request water repellent
- **Pedestal**  
precisely height adjustable, from galvanized and yellow chromated steel, precision threaded bolt, various types according to height requirements
- **Gasket**  
from conductive plastic material, vaulted surface for perfect panel fixing
- **Height fixing**  
Locking glue or fixing clamp (alternatively)
- **Pedestal glue**  
Placing of pedestal base into glue pad
- **Finished floor heights**  
> 500 mm use of stringer is recommended for better lateral stability
- **Wall connection**  
pre - compressed foam rubber, as sound barrier and absorption of horizontal movements
- **Subfloor**  
a 2 - component epoxy coating is recommended in case of air ventilation

### Technical Data

Load and deflection class <sup>1</sup>	1A (2kN)
Reaction to fire performance <sup>2</sup>	A2
Fire resistance performance <sup>3</sup>	F 30
Electrostatic conductivity <sup>4</sup>	$\geq 1 \times 10^6 \Omega$
Weight of system <sup>5</sup>	44 kg/sqm
Floor heights <sup>6</sup>	28 - 2000 mm
Thickness of panel	30,5 mm
Pedestal grid	600 x 600 mm

### Applications

- Computer rooms and control rooms
- Industry and working rooms
- Training and research rooms
- Office and construction areas

### Possible floor coverings <sup>8</sup>

- elastic coverings
- textile coverings
- loosley (free) laid covering tiles

- <sup>1</sup> according to DIN EN 12825 and user guideline with safety factor 2, nominal load in brackets
- <sup>2</sup> according to DIN 4102, A1 (fully non-combustible) according to EN 13501 on request
- <sup>3</sup> according to DIN 4102, up to 800 mm floor heights, REI30 according to EN 13501
- <sup>4</sup> Values depending on floor covering
- <sup>5</sup> floor height 150 mm (FFH), without covering
- <sup>6</sup> installation height, special heights on request
- <sup>8</sup> Panels without edge trim, feedback is required

Technische Änderungen auch ohne Ankündigung vorbehalten.  
 Subject to change without notice.  
 Diese Unterlage ist unser geistiges Eigentum. Sie darf ohne unsere Zustimmung weder vervielfältigt, noch unbefugt verwendet, noch gewerbsmäßig verbreitet oder weiteren Personen vorgelegt werden.